


# QUAD TRON, INC.


303 Camars Drive  
Warminster, PA 18974

Phone: (215) 441-9303  
Fax: (215) 441-9305  
[www.quadtron.com](http://www.quadtron.com)  
Email: [quadtron.inc@gmail.com](mailto:quadtron.inc@gmail.com)

## PREMODULATION FILTER MODEL PMF10P-SMA

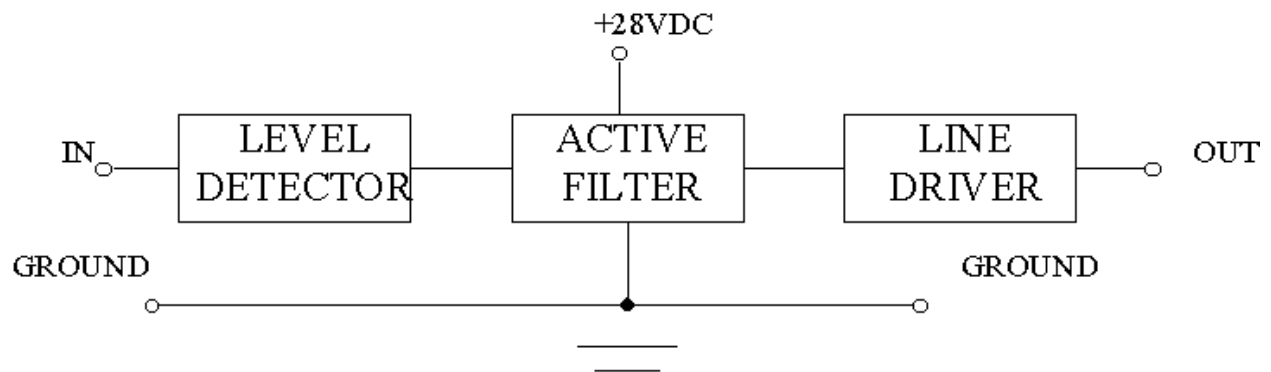

The PMF10P-SMA Pre-Modulation Filter is designed to supply additional current drive for low impedance loads (coax cable) at high bit rates.

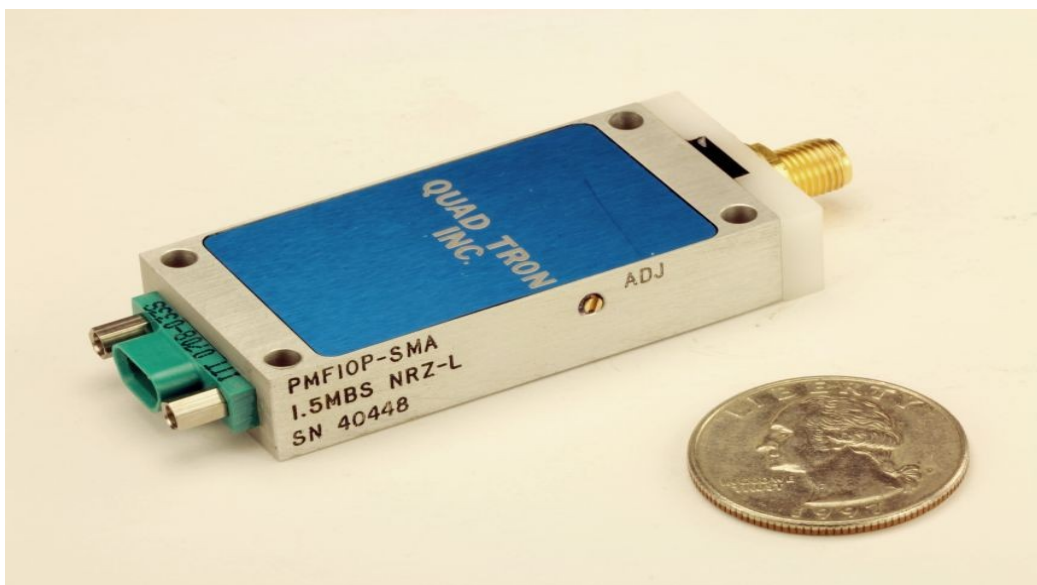

The PMF10P-SMA can drive a 75 ohm load in parallel with high capacitive loads at  $\pm 2.5V$ , 5 Megabit NRZ-L.

The input level detector removes undesirable noise spikes from the PCM data prior to filtering.

## **Features**

Airborne Qualified  
High Stability  
Pot for Amplitude Adjust  
High Gain Accuracy  
Small Size

## **Power Requirements**

Voltage:  $28 \pm 4$  VDC  
Current: 65 ma Nominal  
Over Voltage:  $\pm 40$  VDC

## **Specifications**

Type: 6 Pole Bessel Filter  
Input:  $\pm 10V$  Maximum (Threshold +1.0 To +3.0VDC),  
(CMOS ON TTL)  
Input Impedance:  $> 10$  Meg. Ohms  
Frequency: (specify) 5K Bit To 20M Bit NRZ-L  
Cutoff Frequency Accuracy:  $\pm 10\%$  of Bit Rate @ 25 degrees C and 28 Vdc  
Cutoff Frequency Stability:  $\pm 10\%$  of Bit Rate from -40 to +85 degrees C and 24 to 32Vdc  
Output: (specify)  $\pm 2.5VDC$  or 0 +5VDC, Pot Standard  
Output Impedance:  $< 10$  ohms  
Output Connector: SMA  
Temperature Range:  $-40^{\circ}C$  To  $+85^{\circ}C$

Size:

	inches	mm
Length	2.0	50.8
Width	1.0	25.4
Height	0.43	10.92

## **Environmental:**

Storage Temperature:	-55°C to +125°C
Humidity:	Relative humidity of 95% for two hours at 50°C
Altitude:	Unlimited
Vibration:	30g's RMS from 5 to 2000 Hz in each major axis
Acceleration:	Constant acceleration of 200g's in each axis
Shock:	200g's for 5 milliseconds in each major axis

## **J1 Pin Connections:**

Connector	PN: Cannon MDB1-9S
Mate	PN: Cannon MDB1-9P

<b><u>Pin</u></b>	<b><u>Function</u></b>
2	GND
3	B+
5	IN- ( GND )
7	CHASSIS GND
9	IN+